


S1:(arrow marks) HRs>99.9 % + HRp>98% @ 1030 nm + HTa>95%@ 969-976 nm, AOI 45 deg.
S2: ARsp <0.6% @ 969-976 nm, AOI 45 deg.

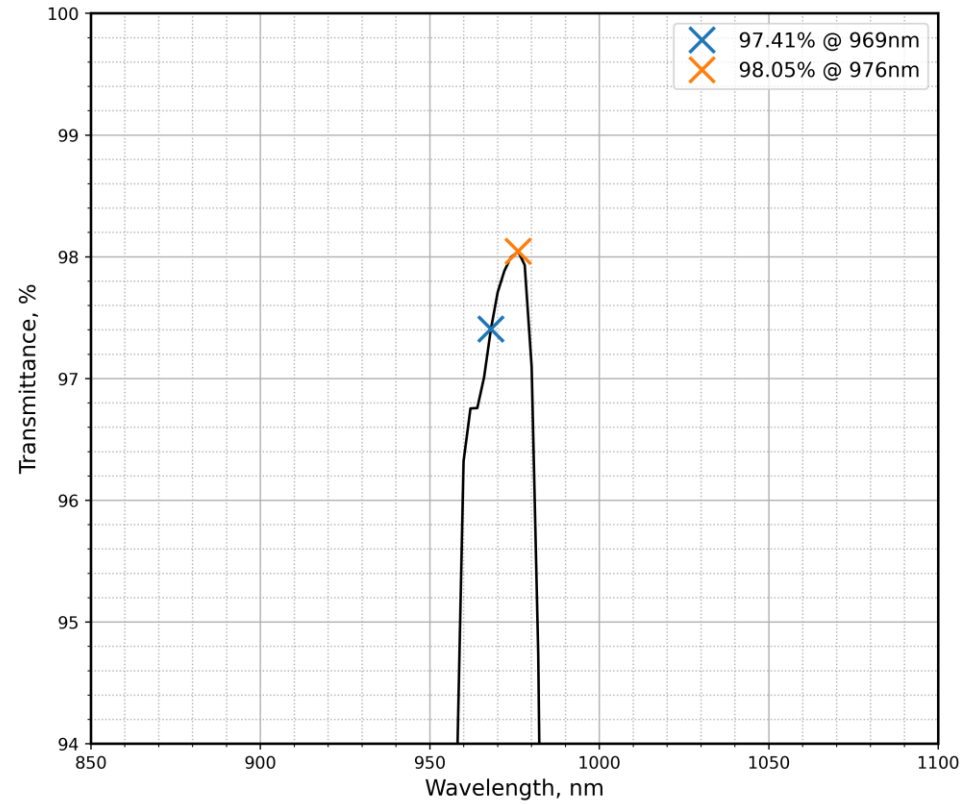


PO3768 Ta i45

Fig. 1.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1:(arrow marks) HRs>99.9 % + HRp>98% @ 1030 nm + HTa>95%@ 969-976 nm, AOI 45 deg.
S2: ARsp <0.6% @ 969-976 nm, AOI 45 deg.

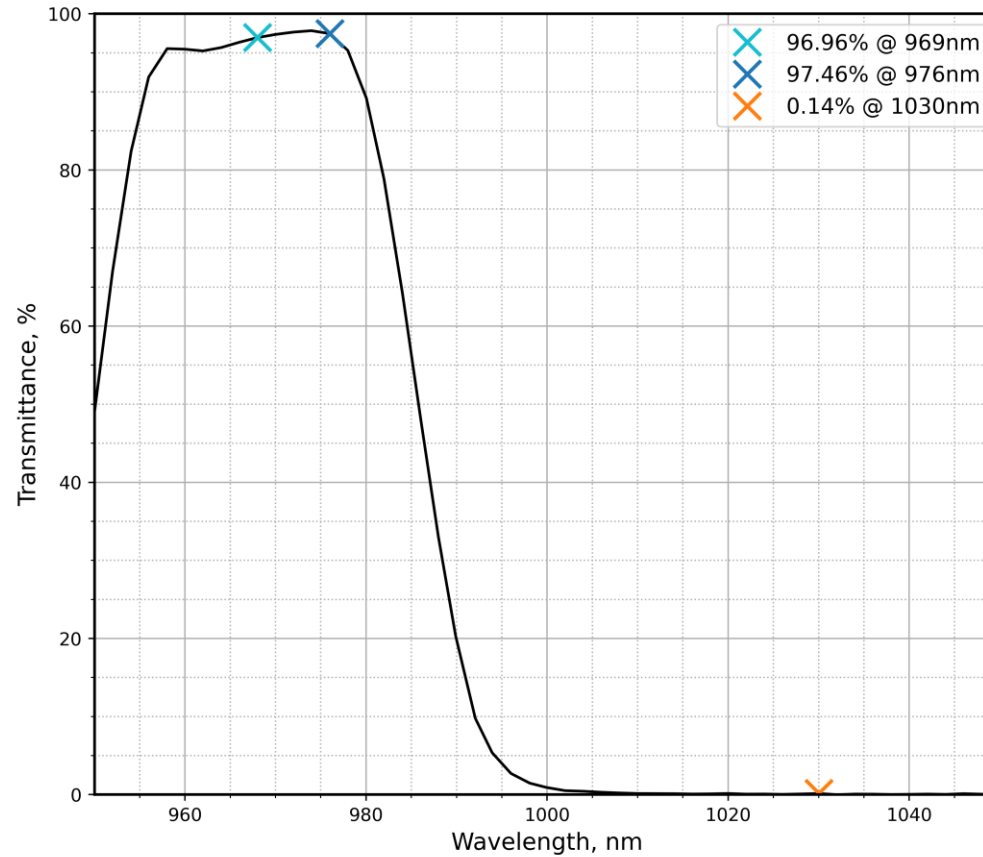


PO3768 Ts i45

Fig. 2.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1:(arrow marks) HRs>99.9 % + HRp>98% @ 1030 nm + HTa>95%@ 969-976 nm, AOI 45 deg.
S2: ARsp <0.6% @ 969-976 nm, AOI 45 deg.

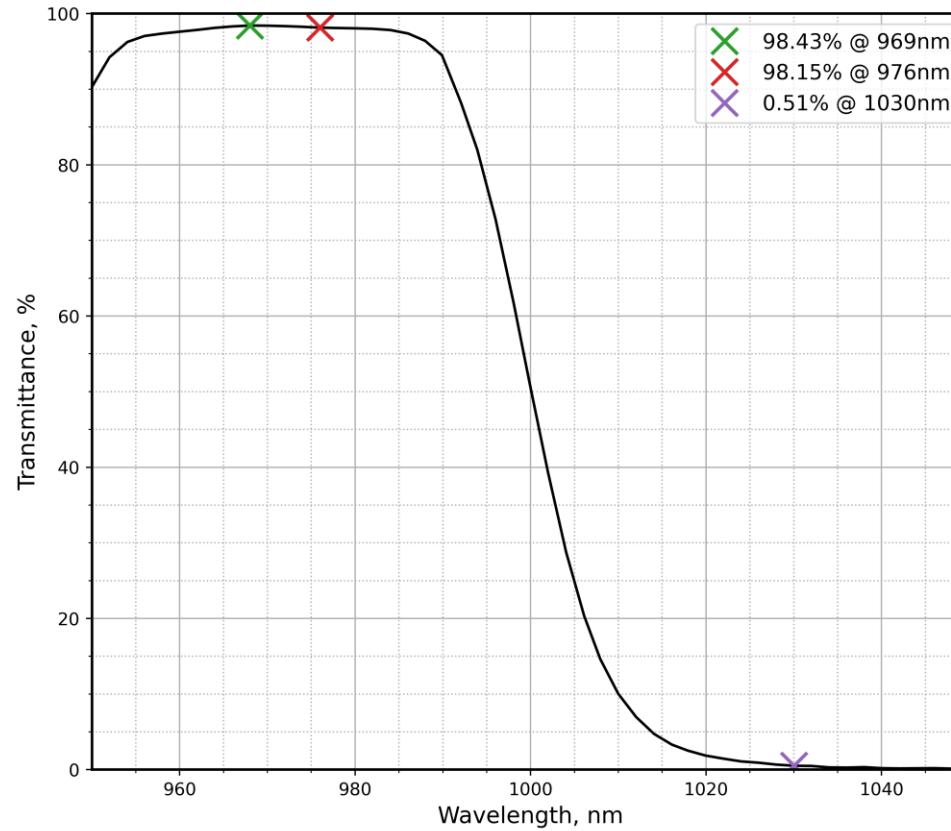

PO3768 Tp i45

Fig. 3.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%