


S1 (arrow marks): HRs>99% @ 410 - 540 nm + HTp>95% @ 760 - 1000 nm + 1100 - 2600 nm + HTs>75% @ 1100 - 2600 nm, AOI=60 deg  
 S2: ARs @ 1100 - 2600 nm + ARp @ 760 - 2600 nm, AOI=60 deg

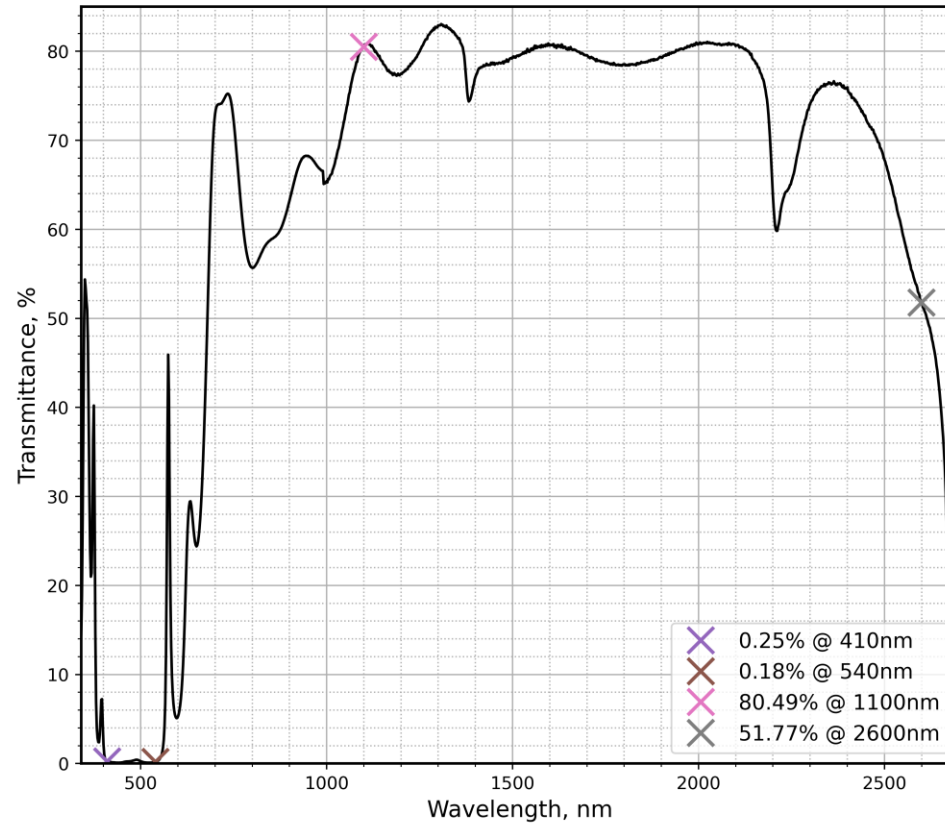


PO5516 Ts i60

Fig. 1.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1 (arrow marks): HRs > 99% @ 410 - 540 nm + HTp > 95% @ 760 - 1000 nm + 1100 - 2600 nm + HTs > 75% @ 1100 - 2600 nm, AOI = 60 deg  
 S2: ARs @ 1100 - 2600 nm + ARp @ 760 - 2600 nm, AOI = 60 deg

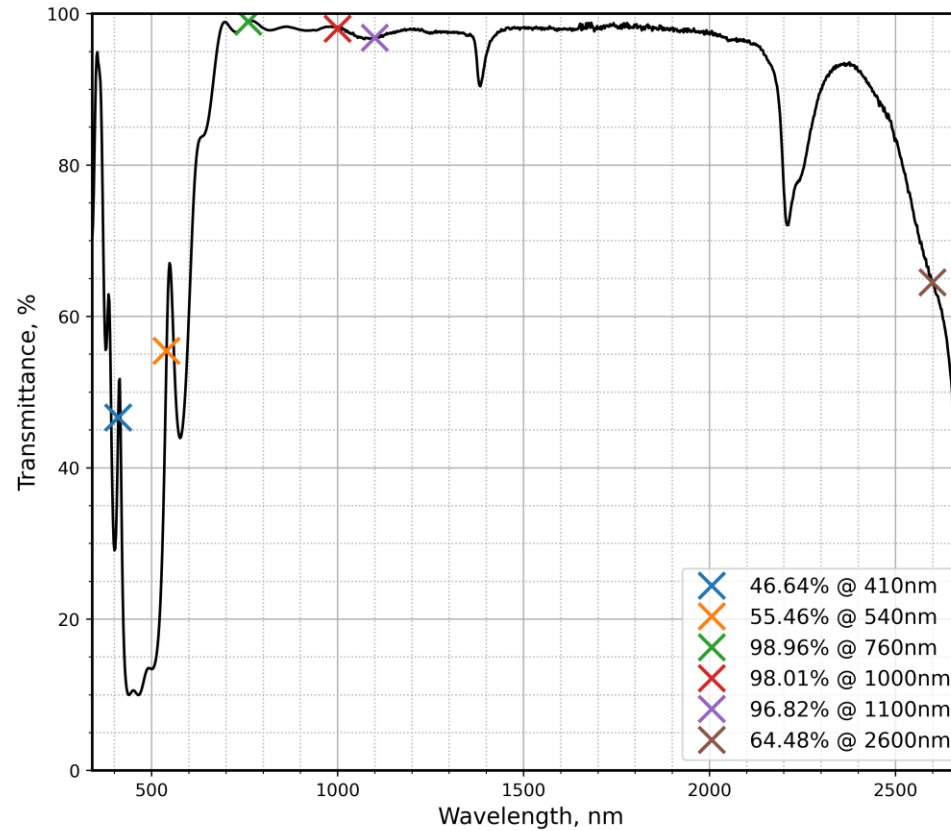

PO5516 Tp i60

Fig. 2.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/- 0.25%