


S1: (arrow marks) HR>99% @ 376-425 nm + HT>98% @ 700-900 nm, AOI 45 deg GDDr +/- 20 fs2@ 376-425 nm
 S2: AR<1% @ 700-900 nm + SCC for improved S1 flatness.

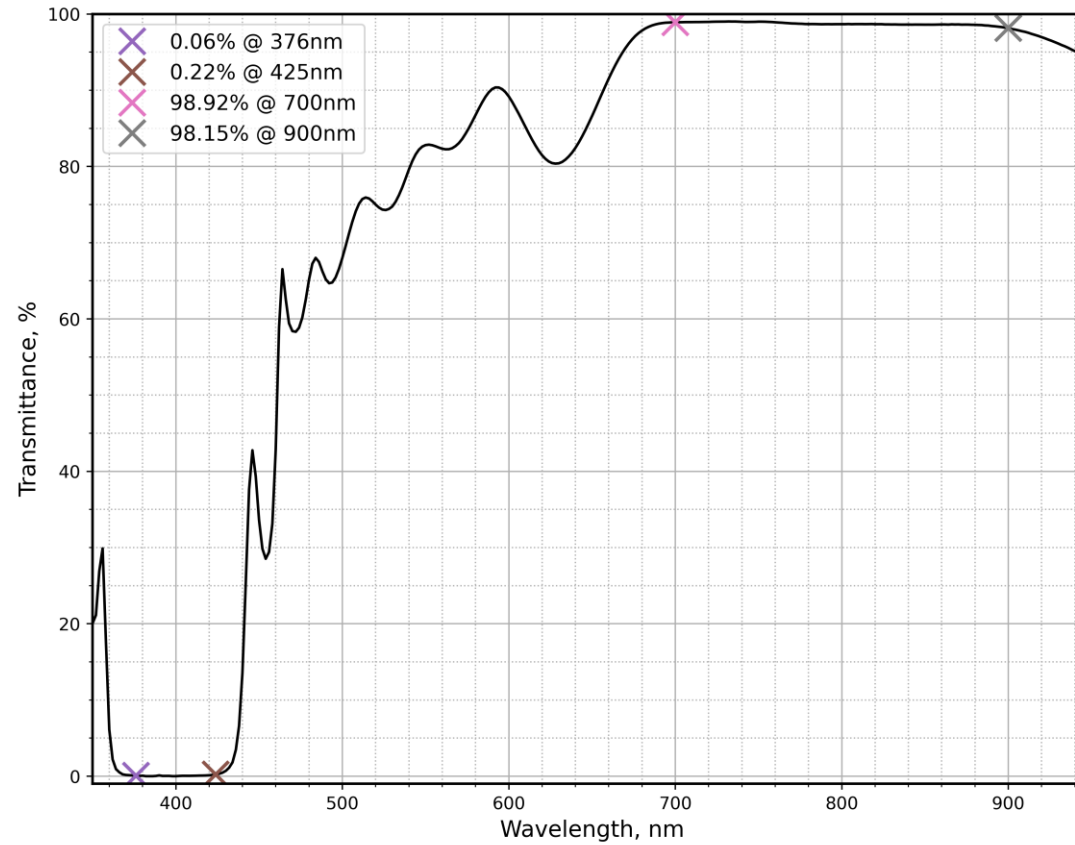

PO4214 Ta i45 S1+S2

Fig. 1.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%