
S1: HRs>99.9%, HRp>99.4% @ 1064 nm + HRs>99.8%, HRp>99.5% @ 532 nm + HR>95% @ 635-650 nm, AOI=45° S2: uncoated

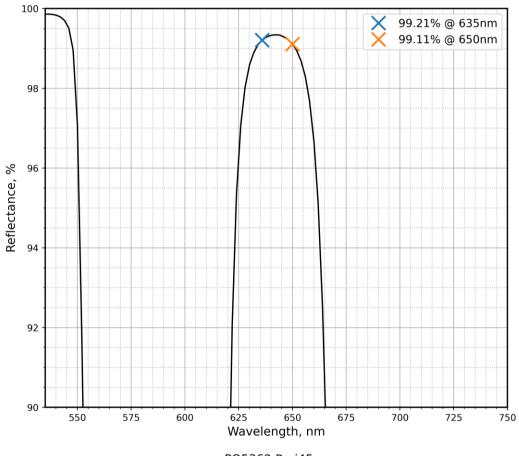


PO5362 Ra i45

Fig. 1.

SIDE MEASURED: S1 only (grinded witness sample)

COMMENTS:

S1: HRs>99.9%, HRp>99.4% @ 1064 nm + HRs>99.8%, HRp>99.5% @ 532 nm + HR>95% @ 635-650 nm, AOI=45° S2: uncoated

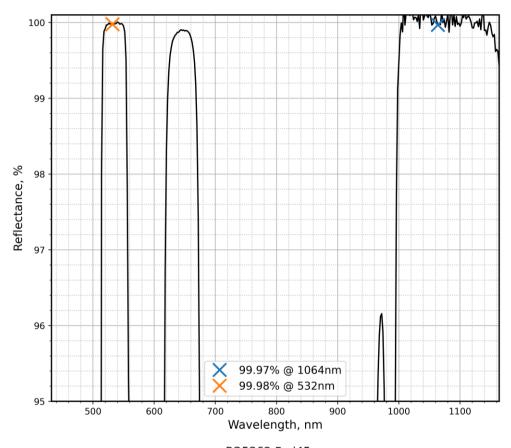

PO5362 Rs i45

Fig. 2.


SIDE MEASURED: S1 only (grinded witness sample)

COMMENTS:



YOUR SIDEKICK FOR LASER OPTICS DEVELOPMENT

S1: HRs>99.9%, HRp>99.4% @ 1064 nm + HRs>99.8%, HRp>99.5% @ 532 nm + HR>95% @ 635-650 nm, AOI=45° S2: uncoated

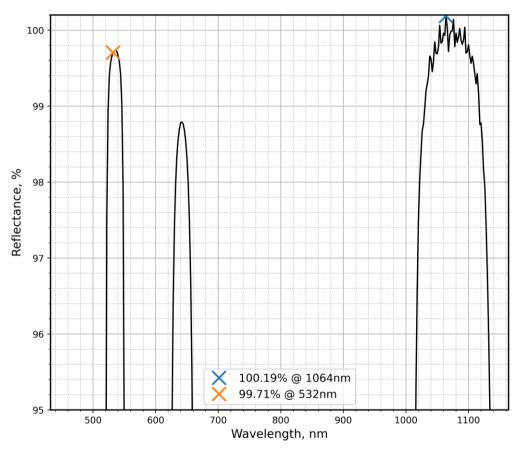

PO5362 Rp i45

Fig. 3.

SIDE MEASURED: S1 only (grinded witness sample)

COMMENTS: Margin of measurement error: +/-0.25%