


S1: (arrow marks) HR>99.5% @ 2940 nm + HR>95% @ 515-532 + 635-655 nm, AOI=45° + 52.5°
S2: uncoated

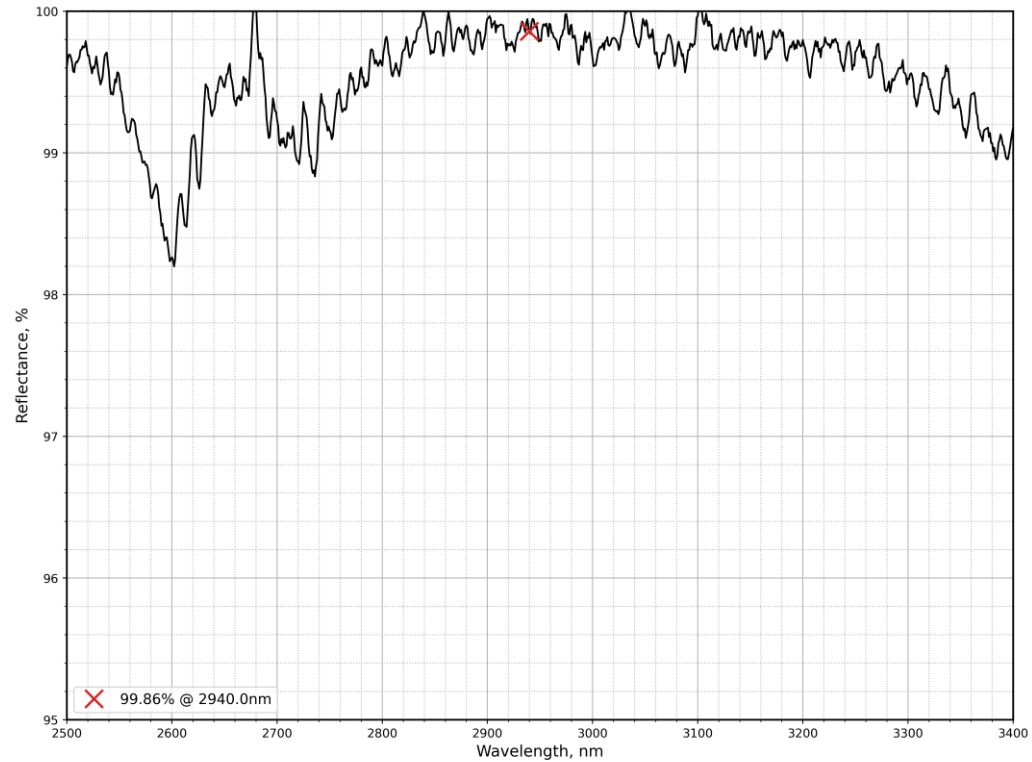


PO8211 Ra i45 IR

Fig. 1.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

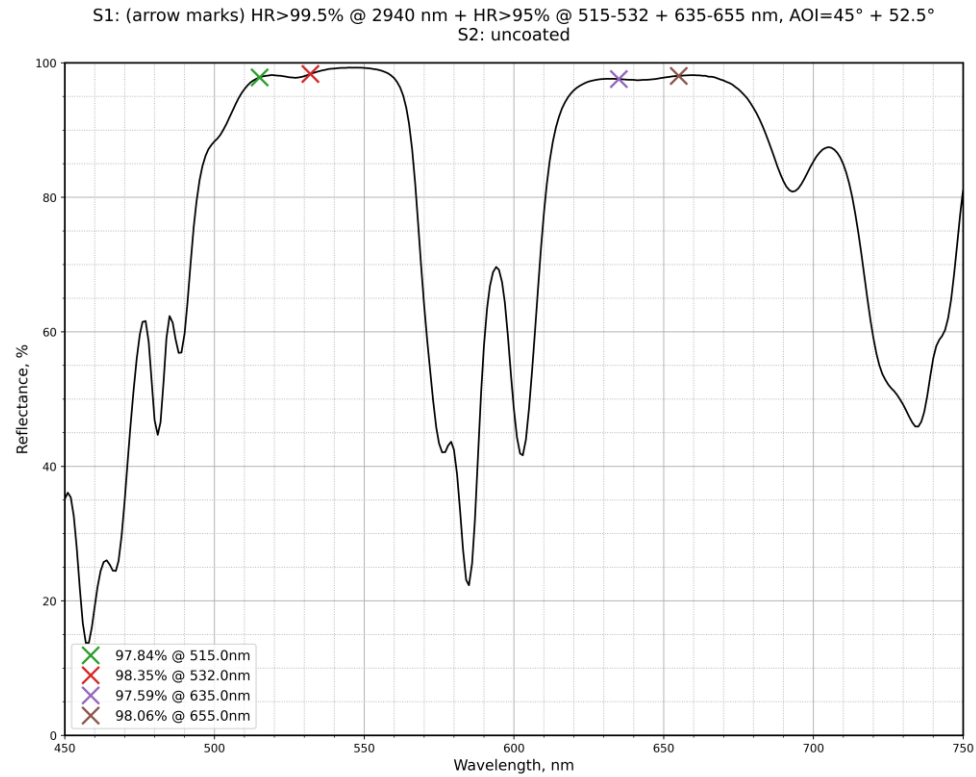


PO8211 Ra i45 Vis

Fig. 2.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

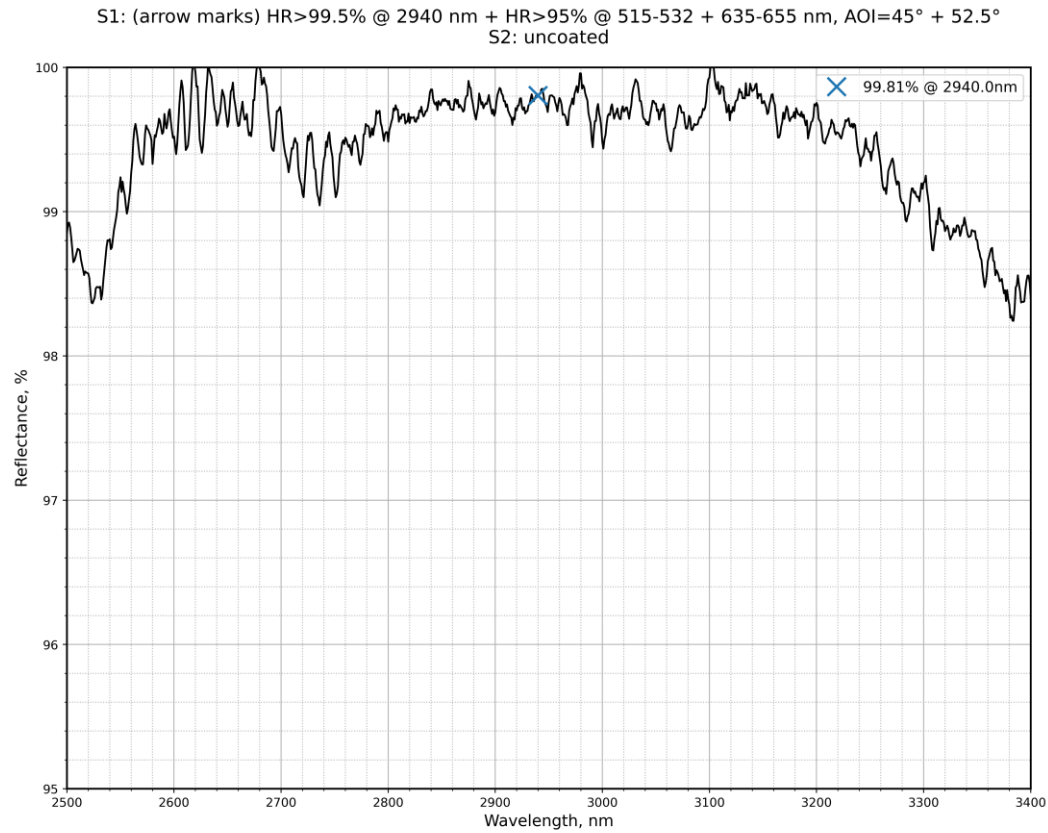


PO8211 Ra i52.5 IR

Fig. 3.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1: (arrow marks) HR>99.5% @ 2940 nm + HR>95% @ 515-532 + 635-655 nm, AOI=45° + 52.5°
S2: uncoated

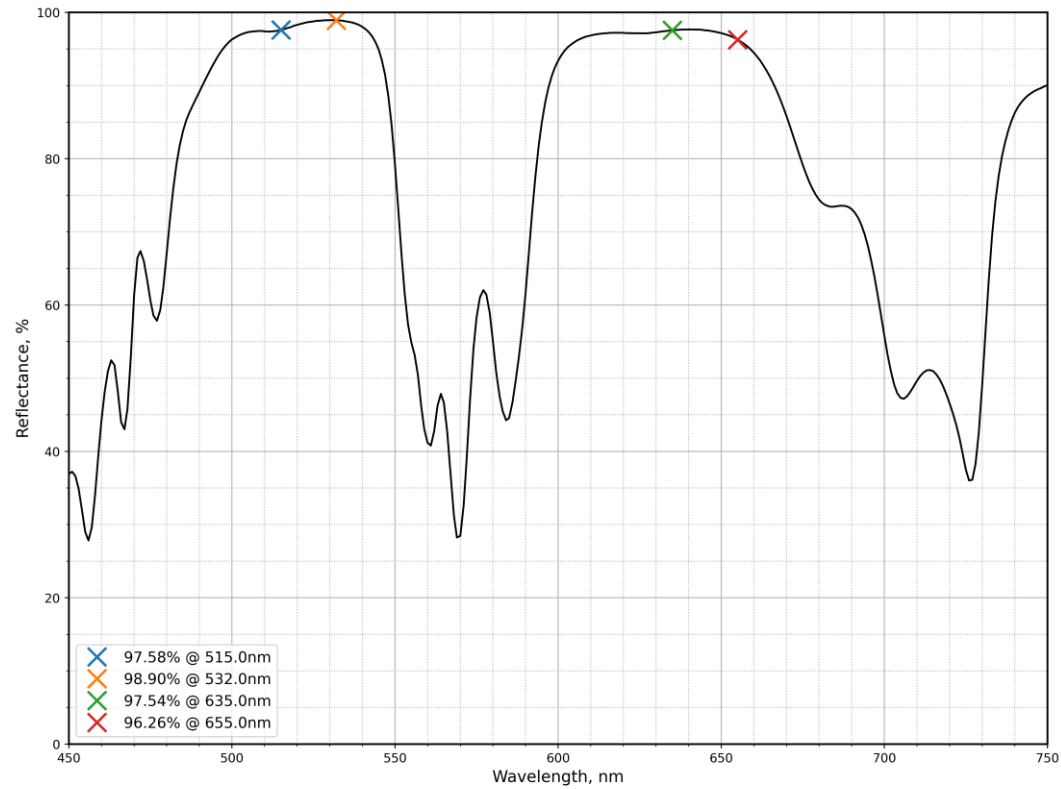

PO8211 Ra i52.5 Vis

Fig. 4.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/-0.25%