

S1: (arrow marks) PRa = 2% +/- 0.3% @ 1550 nm, AOI 45 deg. |Rs-Rp| < 2.5%
S2: ARa < 0.7% @ 1550 nm, AOI 45 deg


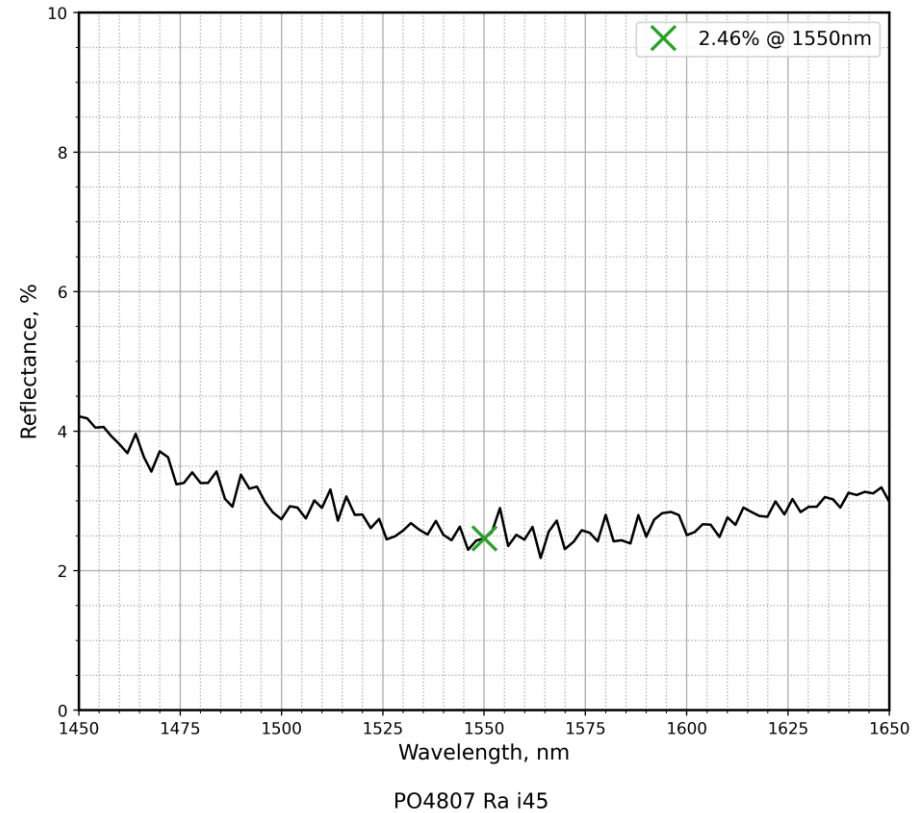


Fig. 1.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1: (arrow marks) PRa = 2% +/- 0.3% @ 1550 nm, AOI 45 deg. |Rs-Rp| < 2.5%
S2: ARa < 0.7% @ 1550 nm, AOI 45 deg

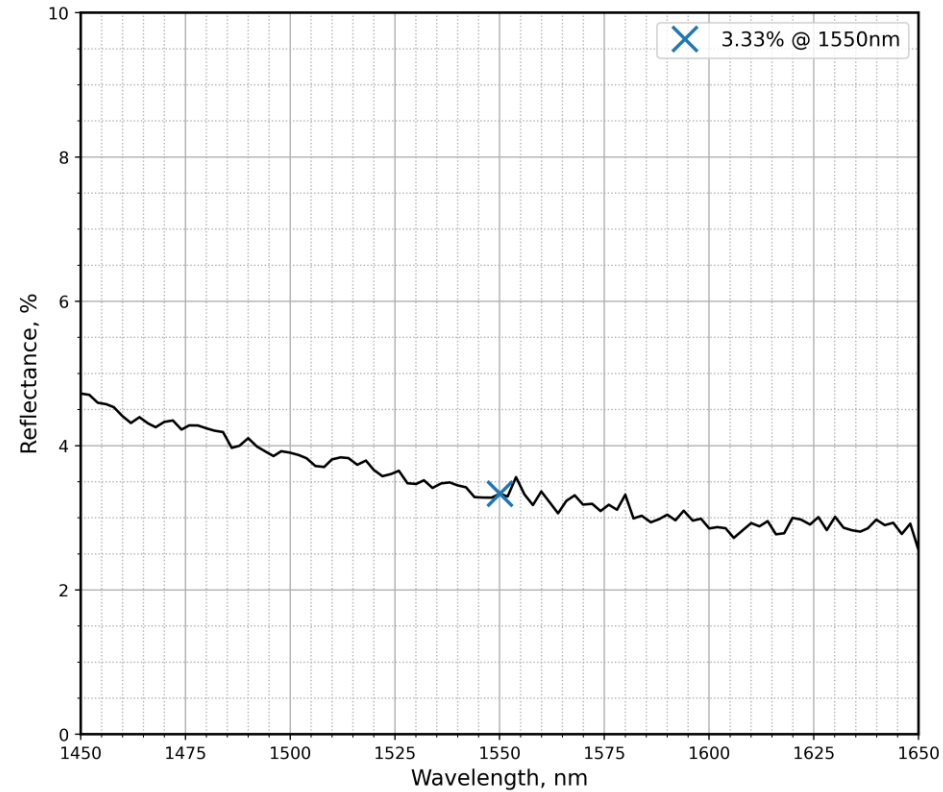

PO4807 Rp i45

Fig. 2.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1: (arrow marks) PRa = 2% +/- 0.3% @ 1550 nm, AOI 45 deg. |Rs-Rp| < 2.5%
S2: ARa < 0.7% @ 1550 nm, AOI 45 deg

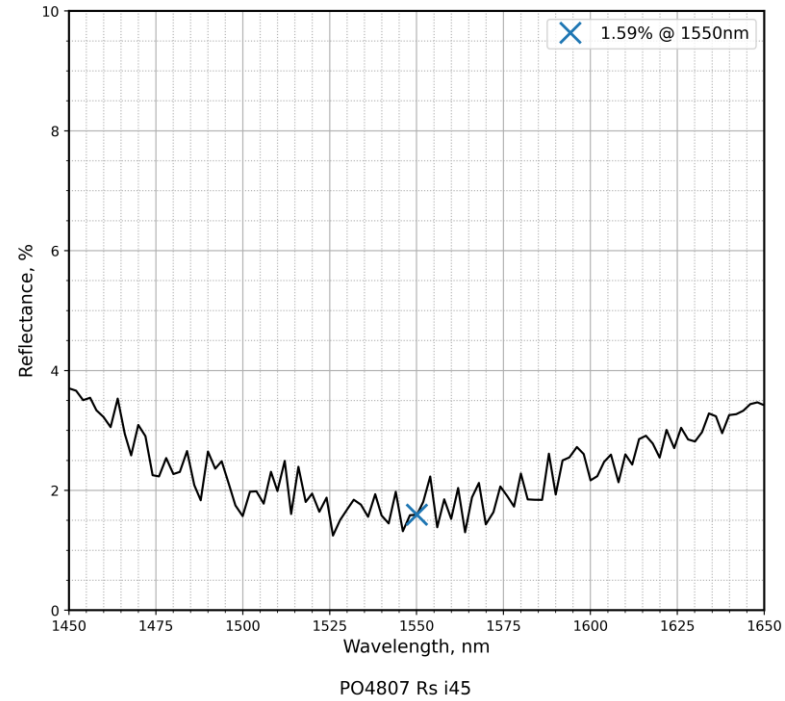


Fig. 3.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%