

S1: (arrow marks) Pol HRs > 99.8% @ 1064 nm HTp > 99%, AOI = 45° (+/- 2° angle adjustment)
S2: Uncoated


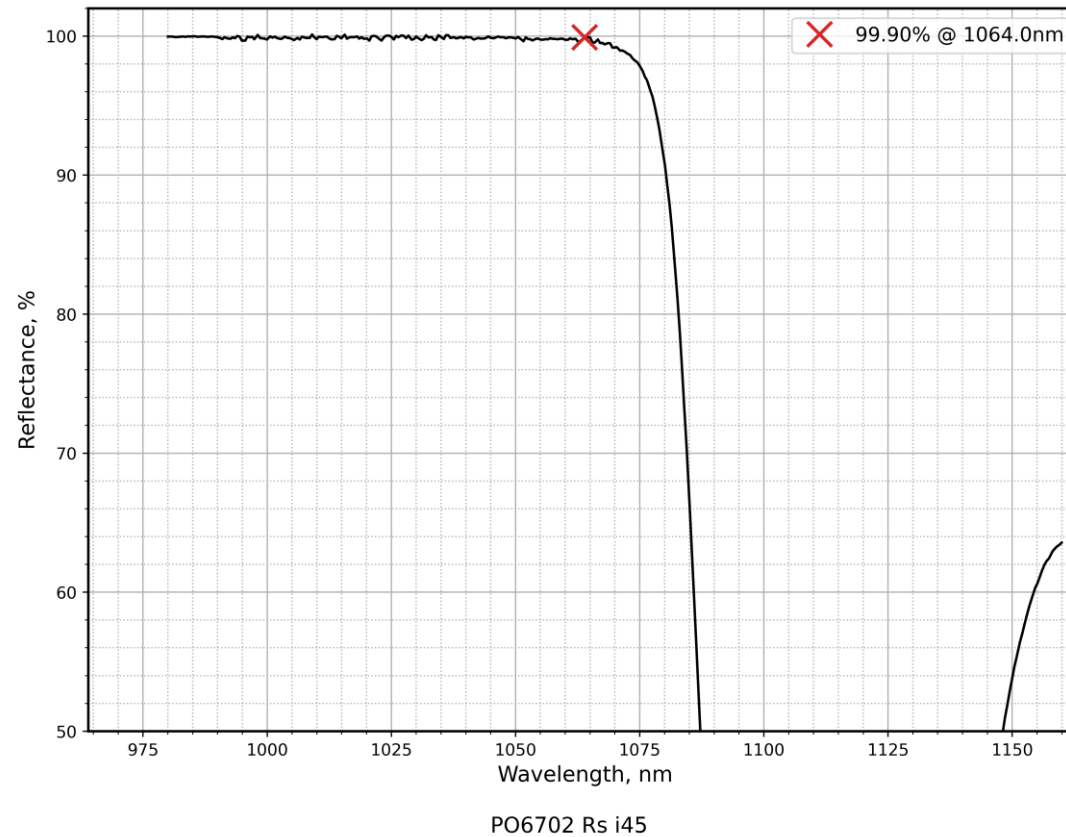


Fig. 1.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/- 0.25%

S1: (arrow marks) Pol HRs > 99.8% @ 1064 nm HTP > 99%, AOI = 45° (+/- 2° angle adjustment)
S2: Uncoated

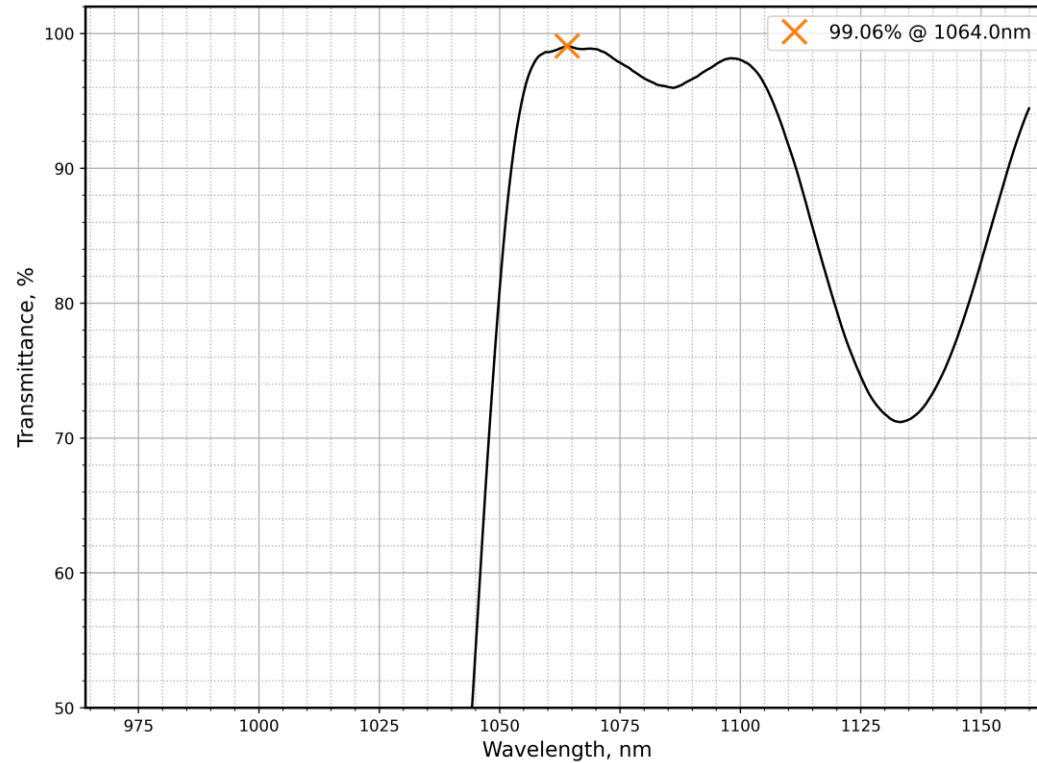

PO6702 Tp i45

Fig. 2.

SIDE MEASURED: S1 (good component)

COMMENTS: Margin of measurement error: +/- 0.25%