


S1: (arrow marks) $R_s > 99.9\%$ @ 1030 nm + $T_p > 98\%$ (>99% best efforts) @ 1030 nm, AOI=45 deg +/- 0 deg
 S2: SCC + $AR_p < 0.1\%$ @ 1030 nm, AOI=45 deg

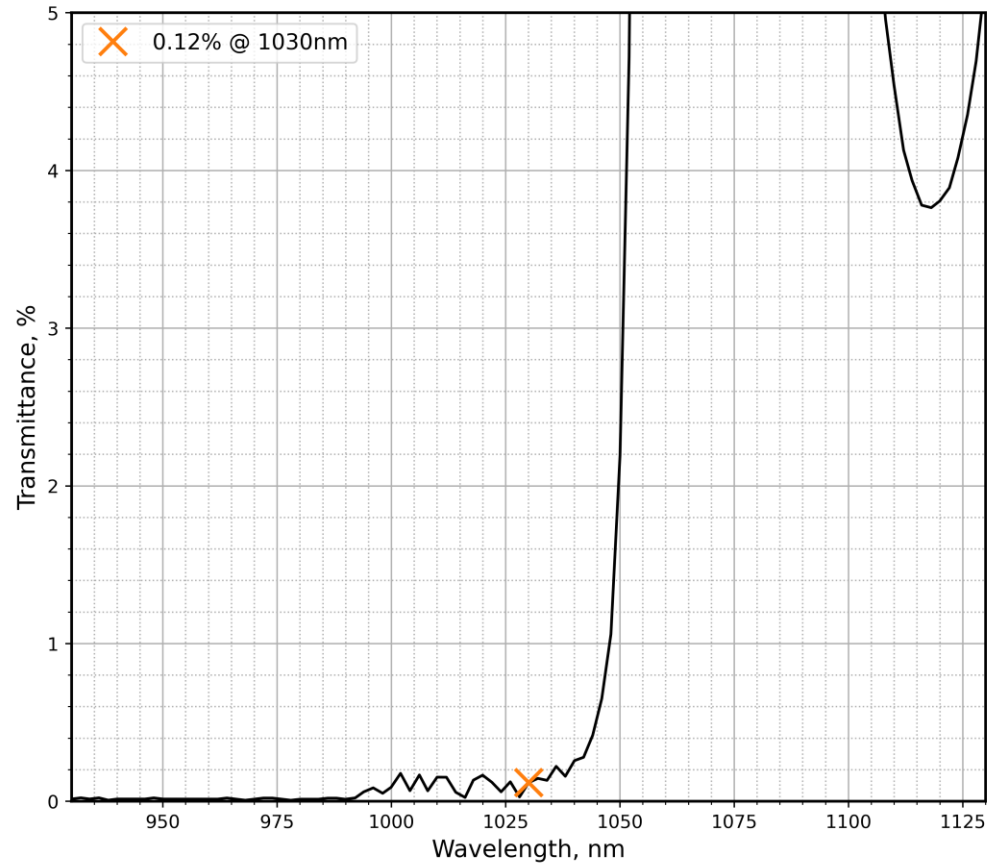


PO5435 Ts i45

Fig. 1.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%

S1: (arrow marks) $R_s > 99.9\%$ @ 1030 nm + $T_p > 98\%$ (>99% best efforts) @ 1030 nm, AOI=45 deg +/-0 deg
S2: SCC + $AR_p < 0.1\%$ @ 1030 nm, AOI=45 deg

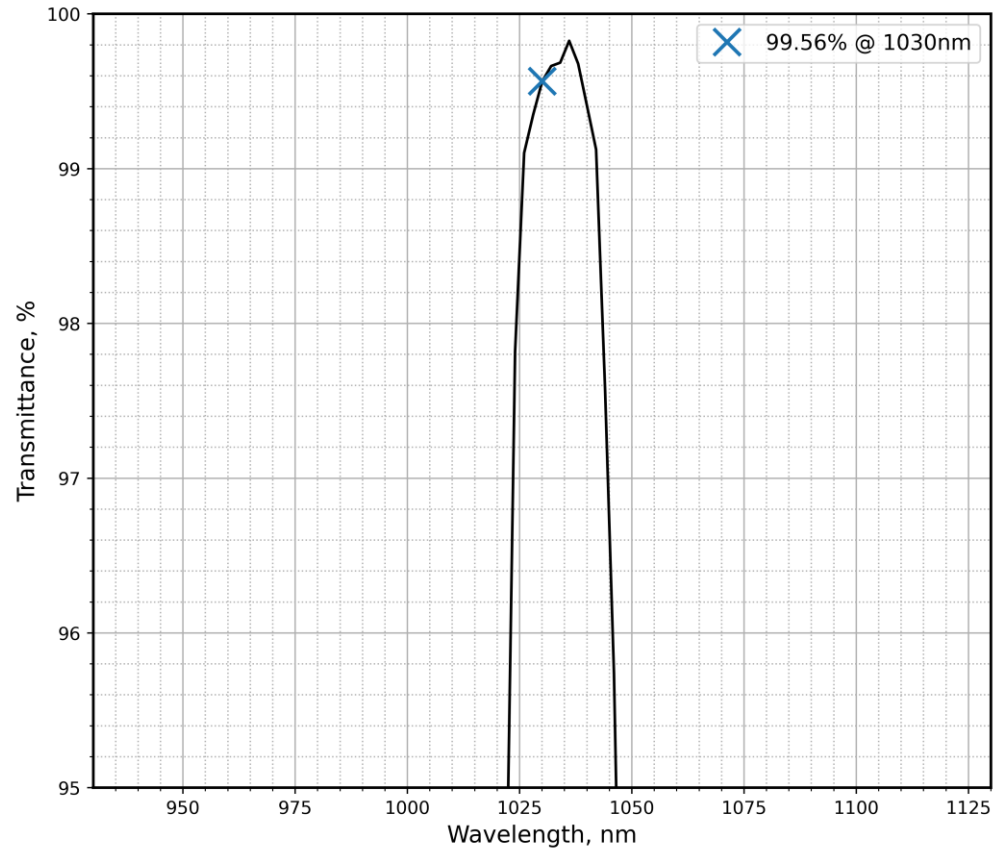

PO5435 Tp i45

Fig. 2.

SIDE MEASURED: S1+S2 (good component)

COMMENTS: Margin of measurement error: +/-0.25%